


SC (Elbow)



- Speed controller with built-in one-touch whittling
- Excellent flow characteristics with easy fine adjustment in low flow range
- Nylon tube and urethane tube can be used together
- Available in a variety of types for convenient use
- Easy to control flow rate and volume
- Easy to set pipe direction
- Sealed screws make work easier
- (CHEMK Seal coating on screw part)

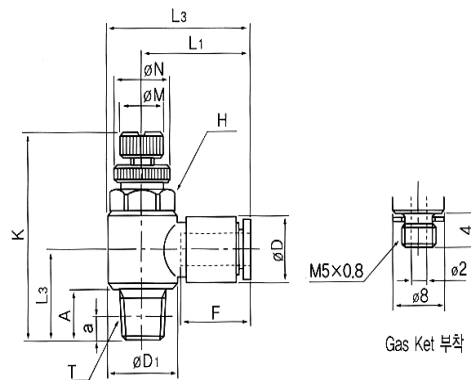

Detailed description

PRESSURE RESISTANCE	10.5Kg f/cm ² (1050Kpa)
MAX.WORKING PRESSURE	7Kg f/cm ² (700Kpa)
MIN.WORKING PRESSURE	1Kg f/cm ² (100Kpa)
ADJUSTED TEMP & FLUID TEMP	5~60°C

SC	8	-	PT ¹ / ₄	-	O
(a)	(b)		(c)		(d)

- (a) Classification (Speed Controller SC)
 (b) Tube external diameter(mm) (4, 6, 8, 10, 12)
 (c) Screw size (M5, PT1/8, 1/4, 3/8, 1/2)

④ Method of control (0:meter out I:meter In)

SC Product Code

MODEL(φ D-T)					
Tube(Metric)-R Thread(PT)			Tube(Inch)-Thread(NPT)		
SC 04-M5	SC 08-1/8	SC 12-1/8	SC 1/8-U	SC 1/4-U	SC 3/8-N2
SC 04-1/8	SC 08-1/4	SC 12-1/4	SC 5/32-U	SC 1/4-N1	SC 3/8-N3
SC 04-1/4	SC 08-3/8	SC 12-3/8	SC 5/32-N1	SC 1/4-N2	SC 3/8-N4
SC 06-M5	SC 08-1/2	SC 12-1/2	SC 5/32-N2	SC 1/4-N3	SC 1/2-N3
SC 06-1/8	SC 10-1/8		SC 3/16-U	SC 5/16-N1	SC 1/2-N4
SC 06-1/4	SC 10-1/4		SC 3/16-N1	SC 5/16-N2	
SC 06-3/8	SC 10-3/8		SC 3/16-N2	SC 5/16-N3	
SC 06-1/2	SC 10-1/2		SC 3/16-N3	SC 5/16-N4	