
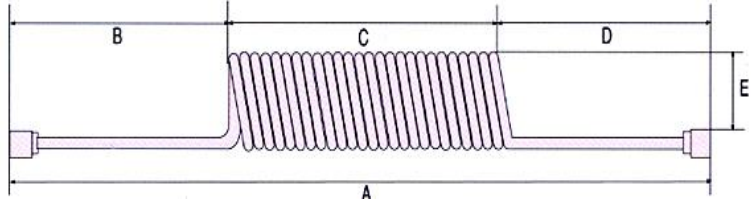


Polyurethane coil tube (with / without coupler)	
	<ul style="list-style-type: none"> • Lightness & softness enable to increase the productivity of piping work. • Excellent mechanical properties. - Industrial robots, pneumatic equipment, hydraulic and etc. • Outstanding of Shock resistance • Various coil tube colors, such as Red, Blue, yellow, transparent, black and others.
	

model	standard	Operating length (M)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Available pressure (kgf/cm ²)
UC-0805 (5M)	8×5×5	4	580	120	340	120	340	5
UC-0805 (7.5M)	8×5×7.5	6	780	120	540	120	340	5
UC-0805 (10M)	8×5×10	8	840	120	600	120	340	5
UC-1065 (5M)	10×6.5×5	4	650	150	350	150	420	5
UC-1065 (7.5M)	10×6.5×7.5	6	820	150	520	150	420	5
UC-1065 (10M)	10×6.5×10	8	1,010	150	710	150	420	5
UC-1208 (5M)	12×8×5	4	590	150	290	150	600	5
UC-1208 (7.5M)	12×8×7.5	6	740	150	440	150	600	5
UC-1208 (10M)	12×8×10	6	890	150	590	150	600	5