


KMV Series


Knob Push / Pull Manually Actuated Spool Valves

- 5/2, 3/2 - 1/8, 1/4
- Direct Operation Type
- Simple Operation
- Space Economy Type

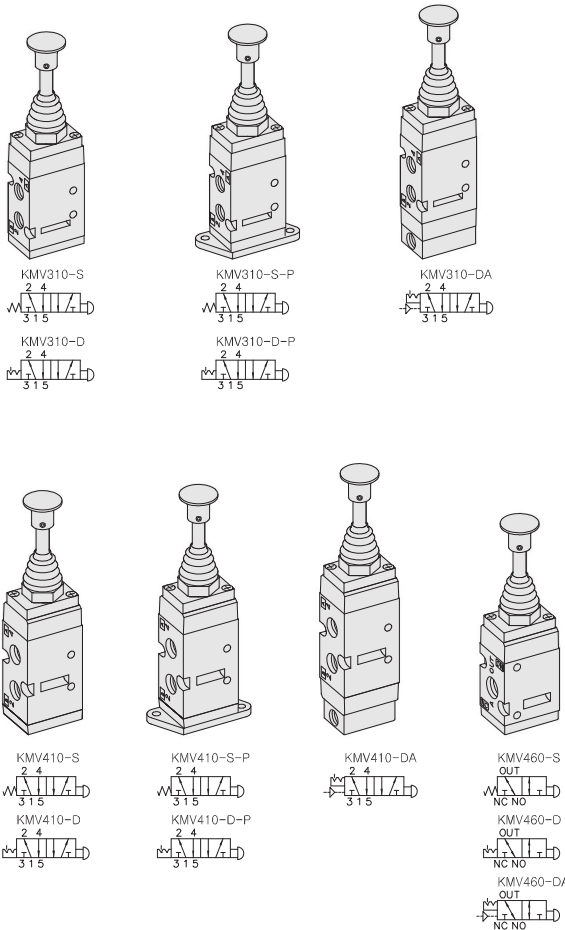


SPECIFICATION

ITEM	SERIES	KMV300	KMV400
	FUNCTION	5/2-Way	5/2, 3/2-Way
Fluids	Compressed Air & Inert Gases		
Port Size	1/8		1/4
Pressure(bar)	0~8.0		
Eff. Sectional Area(mm ²)-5bar	13,5		18,0
Ambient & Fluid Temp.	5~60°C (41~140°F)		
Lubrication	Not Required(Use ISO VG32#)		

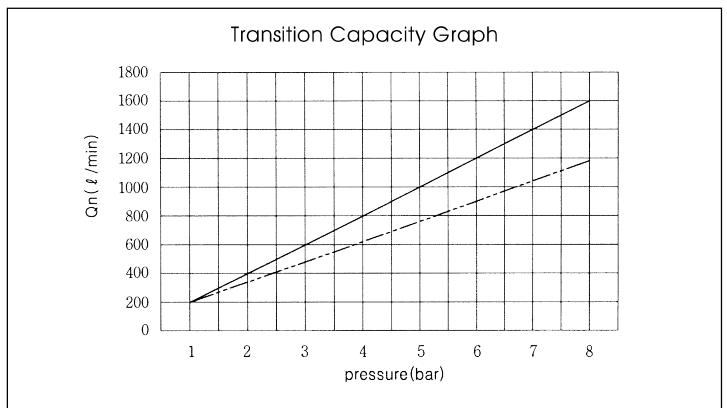

- ### The Material of Parts
- Valve Body : Die-Cast Aluminium
 - Spool : Aluminium
 - Spring : Stainless
 - Lever Parts : Steel, NBR, Aluminium
 - Cap : Zinc Pressure Die-Cast
 - Standing Plate : Steel Plate

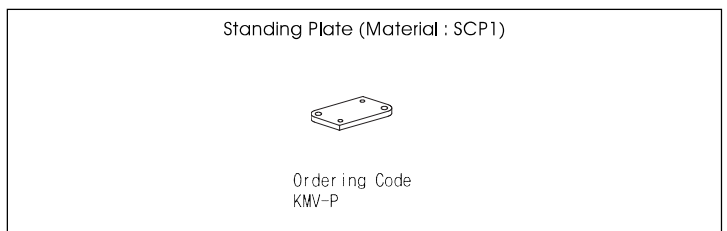

※ The specification on each item can be amended without any prenotice to improve a performance.
 ※ The specification on each item can be different from actual specification.

ORDERING NO.

KMV3 1 0 - S - P

Valve Series	Function	Port Size & Thread	Return Method	Plate
KMV3 : 1/8-Port Body	1 5/2 Single 6 3/2 Normally Closed	0 G 1 NPT	S Push, Spring Return D Push, Full DA Push, Air Return	P Standing Plate
KMV4 : 1/4-Port Body				

